


**Range:** PRESTO SAFE

**Ref:** 64679 - Deck-mounted sensor and timed-flow single tap - 3l/min

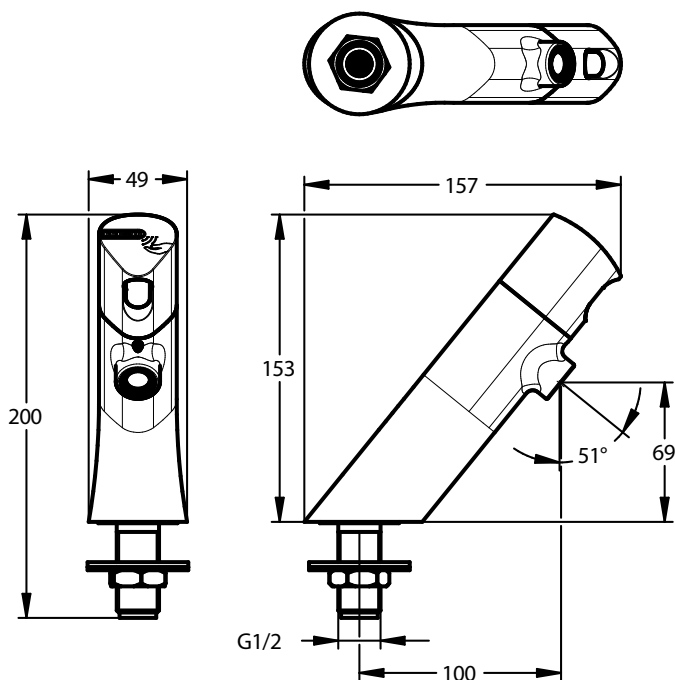

**> Working pressure :**

- 1 to 5 bar

**> Flow :**

- 3 l/min with integrated flow regulator
- High quality anti-limescale aerator
- Anti-water-hammering design

**> Flow time:**

- 7 sec adjustable with PRESTOCOM : <http://www.presto.fr/whatabout/prestocom/>
- Sensor trigger suitable for elderly and disabled people

**> Hydraulic supply :**

- G 1/2" (15x21) - Cold or premixed water

**> Power supply :**

- Delivered 9V lithium battery

**> Material and colour finish :**

- Brass body
- Chrome finishing

**> Thermal resistance :**

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

**> Security :**

- Automatic shutdown of solenoid valve in case of power failure or sensor error
- Duty flush 30 sec each 24h after last use (adjustable flow time and frequency)
- Low battery alert (blinking led light)

**> Delivered with :**

- 1 Lithium Battery
- 1 Brass clamping nut
- 1 Gasket and 1 Washer
- 1 Filter gasket
- 1 Self-adhesive sticker
- Instruction manual

**> Standards & approvals :**

- Brass body in accordance with NF EN1982, EN12164, NF EN 12165, UBA list compliant
- 200-hour neutral salt spray resistant (NSS) in accordance with NF ISO 9227
- ACS

Ce document n'est pas contractuel ; nous nous réservons le droit de modifier les caractéristiques de nos produits sans préavis. Toutes nos marques et tous modèles sont déposés.

