
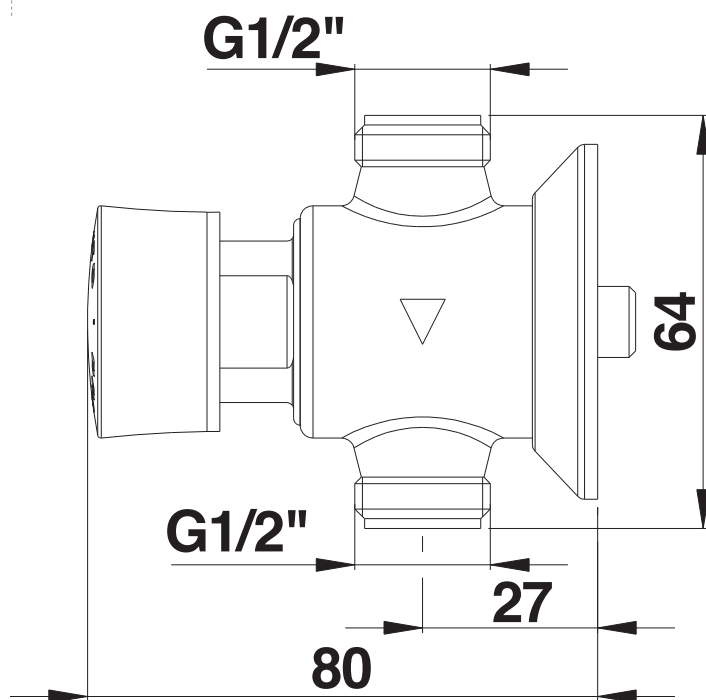


Range: PRESTO 12 NEO

Ref: 31001 - Wall-mounted exposed timed-flow urinal tap, in-line water inlet, without nut

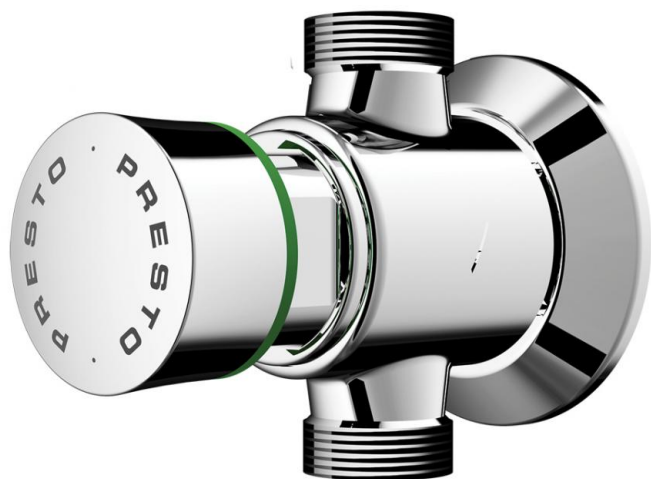

> Working pressure :

- 1 to 5 bar

> Flow :

- 9 l/min at 3 bar - 4 position flow adjustment device
- Anti-water-hammering design

> Flow time :

- 6 seconds (± 2 sec.)

> Hydraulic supply :

- In-line water inlet
- M G 1/2" (15x21) Inlet and outlet

> Delivered with :

- 1 Flat gasket
- 1 Loose wall flange
- 1 Instruction manual

> Standards & approvals :

- Brass body in accordance with EN 1982, EN 12164, EN 12165
- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

Ce document n'est pas contractuel ; nous nous réservons le droit de modifier les caractéristiques de nos produits sans préavis. Toutes nos marques et tous modèles sont déposés.

