


**Range:** Accessory

**Ref:** 90711 - Transformer for DIN rail mounting 230 - 12 Vac - 35VA

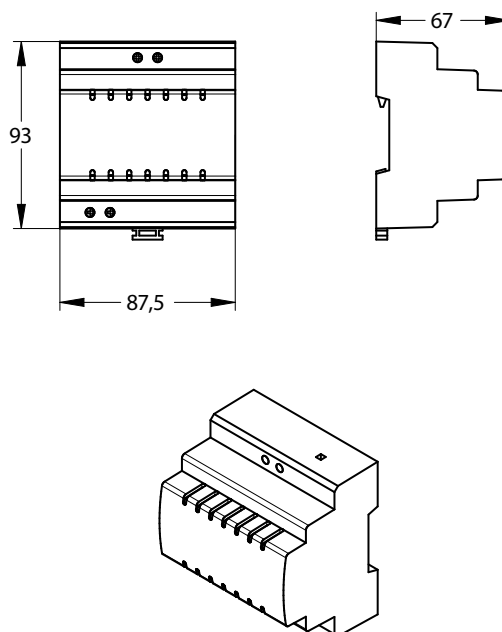

## > Presto Transformer for DIN rail mounting - 5 modules

### > Safety norms and standards:

- Safety Standard EN61558
- EMC Standard EN55022/B - EN55024 - EN61000-3-2-(3)
- CE European Directives CE 2006/95/ECC - 89/336
- Transformer Insulation Class B
- Degree of protection IP 20

### > Service conditions

- Service condition continuous
- MTBF (MIL HDBK217) ~ 250'000 h
- Service temperature - 5°C / + 40°C
- Relative humidity 0 % ÷ 95 %

### > Voltage and Current

- Nominal input voltage 230 Vac +/- 10%
- Nominal frequency 50 - 60 Hz
- Output voltage 12 Vac
- No-load voltage 13,2 Vac
- Output voltage precision ± 5 %
- Nominal output current 2,92 A
- Nominal power 35 VA

### > Protection

- Overload protection PTC
- Short circuit protection PTC
- Protection on Primary Side – Thermofuse 145°C & FuseT 250mA
- Protection in the mains power input (IEC 898) - 16A characteristic B

### > Dimension:

- width 87,5mm, height 93mm, thickness 66,5mm
- weight 0,78Kg

