

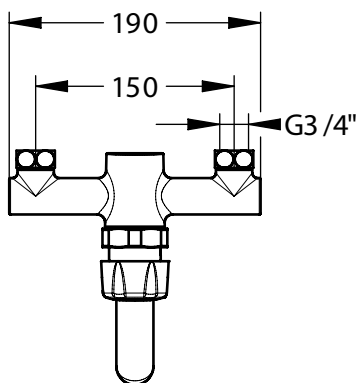
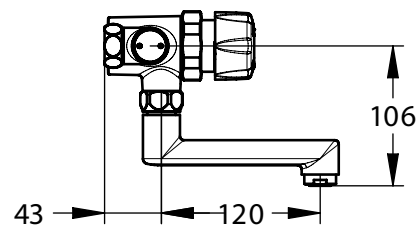


Range: Timed flow tap ware for Ablution

Ref: 35307 - Wall mounted PRESTO ALPA MONO mixer tap



> Working pressure:

- 1 to 5 bar

> Flow:

- 1,9 l/min maximum with integrated flow limiter
- Dual Flow Regulation (inlet and outlet)
- Spray type
- Anti-water-hammering design

> Flow time:

- 15 seconds (- 5 / + 5 seconds)
- Equipped against corrosion and lime scale with a self-cleaning needle
- Constant and reliable time flow with the use of synthetic ruby mechanism

> Hydraulic supply:

- Female Nut G 3/4" (20x27)
- Integrated NF non return valves

> Material and colour finish:

- Chrome-plated knob
- One piece brass body

> Thermal resistance:

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

> Delivered with:

- 2 Filter seal
- 1 Straight Swivel spout 120mm (with locking possibility)
- 1 Brass Pin (to lock spout rotation)

> Standards & approvals:

- Brass body in accordance with EN 1982, EN 12164, EN 12156
- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227
- SASO Approved - Rate A